


**1200mm SPOON DRAIN**

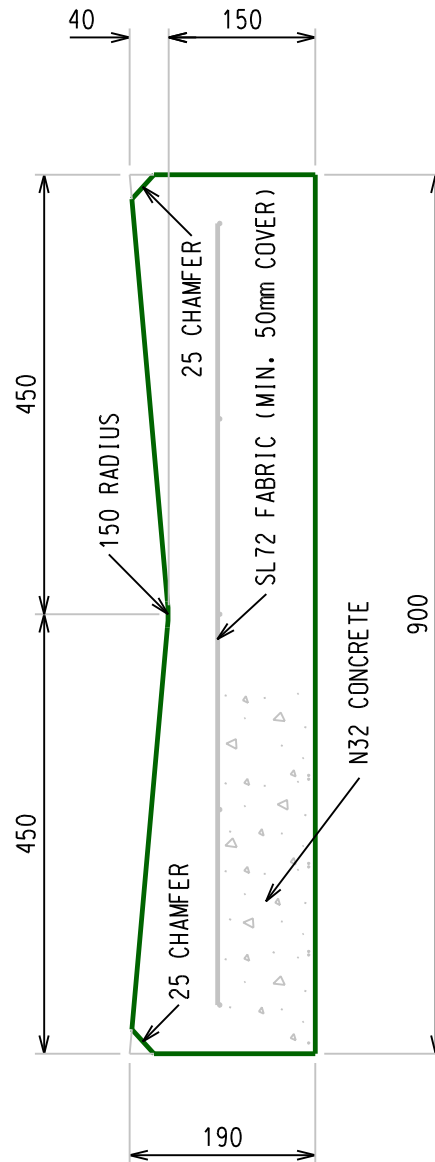

**900mm SPOON DRAIN**

**NOTE:-**

1. ALL KERBING TO BE IN ACCORDANCE WITH AS 2876-2000, CONCRETE KERBS AND CHANNELS (GUTTERS)
2. PROFILES ARE ONLY TO BE USED FOR SPOON DRAINS CROSSING THE PRIORITY ROAD.
3. ALL KERBING CONCRETE TO CONTAIN BLACK OXIDE UPTO THE RATE OF 10Kgs./Cu.m., TO MATCH EXISTING.
4. ALL CONSTRUCTION TO BE IN ACCORDANCE WITH COUNCIL'S "TECHNICAL SPECIFICATION FOR CONCRETE WORK"
5. ALL SPOON DRAINS TO BE N32 CONCRETE CONTAINING SL72 MESH

**STANDARD DETAIL**  
**900mm SPOON DRAIN**  
**1200mm SPOON DRAIN**  
**TRANSVERSE ROAD CROSSING**



**CITY OF MITCHAM**

DRAWING NO.

**SD-600**

SHEET

**4 B**

**A4**

DRAWN / DESIGNED  
*J.R.*

COPY ISSUE DATE

PREVIOUS ISSUE DATE

ISSUED DATE

*September 2002*

*January 2007*