




FOOTPATH/CYCLEWAY - BLOCK PAVED

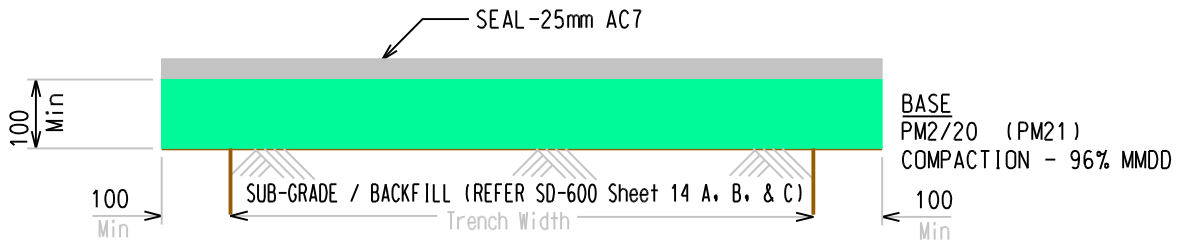

FOOTPATH/CYCLEWAY - ASPHALT

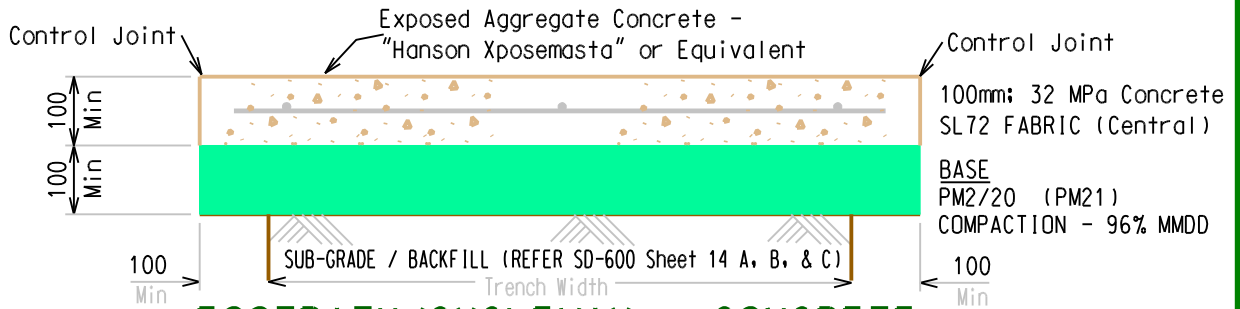

FOOTPATH/CYCLEWAY - CONCRETE

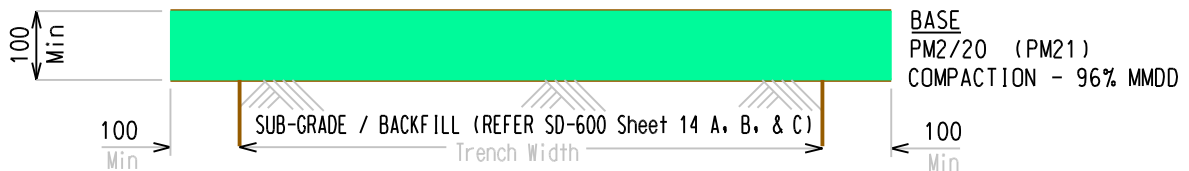

FOOTPATH/CYCLEWAY - UNSEALED

NOTES:-

- Asphalt and Concrete Footpaths shall be "Saw Cut" prior to excavation commencing. Block Pavers shall be removed, stacked, and replaced as whole units.
- The Footpath surface shall be reinstated to full width for the length of the excavated area. Concrete Footpaths shall be reinstated full width between "Control Joints".
- Excavated material shall not be reused in the reinstatement of trenches and shall be removed from site.
- Recycled Materials are not approved for use in the reinstatement of trenches and footpaths.
- The Contractor shall provide all regulatory signs and warning devices for the protection of the public in accordance with the "Road Traffic Act" and "Occupational Health & Safety Act".
- Concrete Exposed Aggregate Footpaths within Craighburn Farm shall be reinstated with "Hanson Xposemasta - Country Tan"

STANDARD DETAIL

FOOTPATH PAVEMENT REINSTATEMENT OF TRENCHES



CITY OF MITCHAM

DRAWING NO.

SD-600

SHEET

15 B

A4

DRAWN / DESIGNED
J.R.

COPY ISSUE DATE

PREVIOUS ISSUE DATE
January 2007

ISSUED DATE
April 2012