



## HOTMIX VEHICLE CROSSOVER SECTION

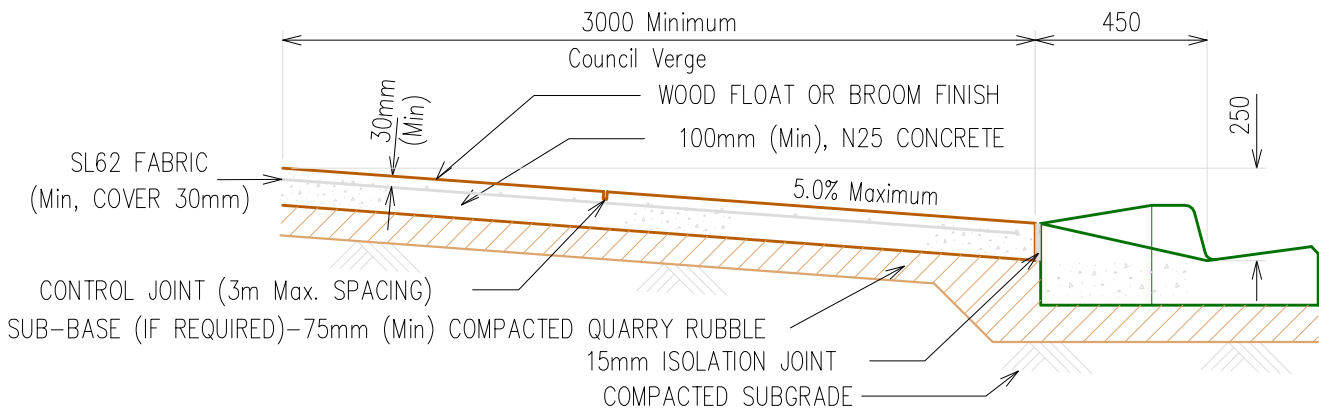

## CONCRETE VEHICLE CROSSOVER SECTION

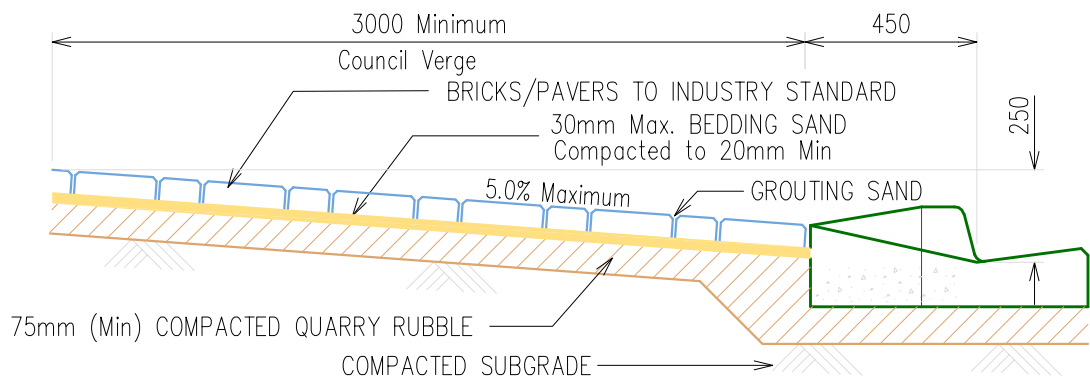

## PAVED VEHICLE CROSSOVER SECTION

NOTE: -

1. 250mm FREE BOARD FROM KERB INVERT (or EDGE OF ROAD) IS IN ACCORDANCE WITH THE "QUEENSLAND URBAN DRAINAGE MANUAL" SECTION 5.35.
2. ALL KERBING TO BE IN ACCORDANCE WITH AS 2876-2000, CONCRETE KERBS AND CHANNELS (GUTTERS)
3. CROSSOVER PAVEMENTS: - REFERENCES; AS 3727, GUIDE TO RESIDENTIAL PAVEMENTS; CMAA T44, T45, & T46
4. ALL KERBING CONCRETE TO CONTAIN BLACK OXIDE UPTO THE RATE OF 10Kgs./Cu.m., TO MATCH EXISTING.
5. ALL CONSTRUCTION TO BE IN ACCORDANCE WITH COUNCIL'S "TECHNICAL SPECIFICATION FOR CONCRETE WORK"

# STANDARD DETAIL COMPLYING RESIDENTIAL ENTRANCE VEHICLE CROSSOVER



## CITY OF MITCHAM

DRAWING No.

# SD-600

SHEET

9

A4

DRAWN / DESIGNED  
J.R.

COPY ISSUE DATE

PREVIOUS ISSUE DATE  
July 2003

ISSUED DATE  
January 2007