


SEAL REINSTATEMENT - Greater Than 1m from Kerb &/or Road Centre

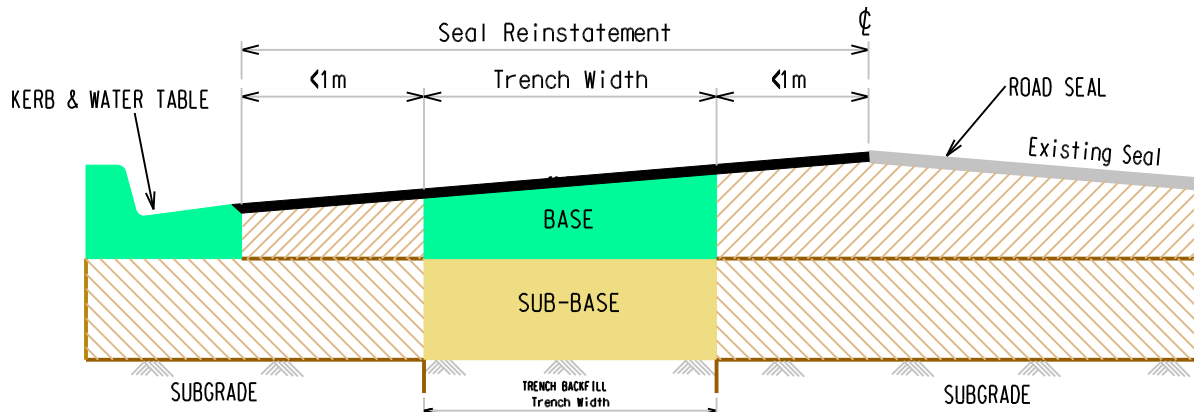

SEAL REINSTATEMENT - Less Than 1m from Kerb &/or Road Centre

NOTES:-

1. Prior to reinstating the road seal, the reinstatement extent shall be saw cut or profiled to obtain a clean edged interface between existing and new seal.
2. Where trenches are excavated within 1m of a concrete kerb; a sealed road edge; centre of a road; parking lane line; lane line; or marked centre line, the seal reinstatement shall be increased up to the kerb; road edge, road centre, or line marking.
3. Where trenches are excavated in excess of 1m from a concrete kerb; a sealed road edge; centre of a road; parking lane line; lane line; or marked centre line, the seal reinstatement shall be increased a minimum of 100mm from the trench edge.
4. The extent of the seal reinstatement shall have straight continuous edges to the maximum width of the excavated area including all pits and chambers. The seal reinstatement shall not "dog leg" around service pits and chambers.

STANDARD DETAIL ROAD SEAL REINSTATEMENT



CITY OF
MITCHAM

DRAWING NO.

SD-600

SHEET

15 C

A4

DRAWN / DESIGNED

J.R.

COPY ISSUE DATE

PREVIOUS ISSUE DATE

ISSUED DATE

May 2012