


LOCAL ROADS; CUL-DE-SAC; SERVICE ROADS; LANEWAYS; CARPARKS

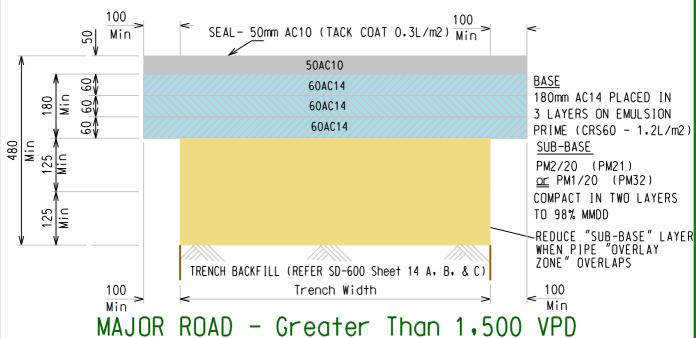

DISTRIBUTOR ROADS; COLLECTOR ROADS; COMMERCIAL & INDUSTRIAL ROADS

1. The road surface shall be "Saw Cut" to the full depth of required asphalt reinstatement prior to the excavation commencing. The cut shall be a straight line to the full width of the excavation including chambers and pits.

2. Excavated material shall not be reused in the reinstatement of trenches and road pavements. All excavated material shall be removed from the site.

3. Recycled Materials are not approved for use in the reinstatement of trenches and road pavements.

4. The Contractor shall provide all regulartory signs and warning devices for the protection of the public in accordance with the "Road Traffic Act" and "Occupational Health & Safety Act".

5. Where trench excavations are within 1m of the road or kerb edge, the road "Base" layer and road "Seal" shall be extended to meet the road or kerb edge.

STANDARD DETAIL

NOTES:-

ROAD PAVEMENT REINSTATEMENT OF TRENCHES

DRAWN / DESIGNED COPY ISSUE DATE PREVIOUS ISSUE DATE ISSUED DATE January 2007 J.R. April 2012



DRAWING NO.

15